



INDOOR & OUTDOOR

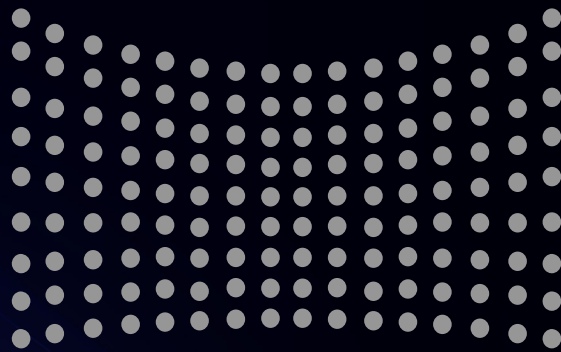

LED MEDIA GROUP

Display Technology

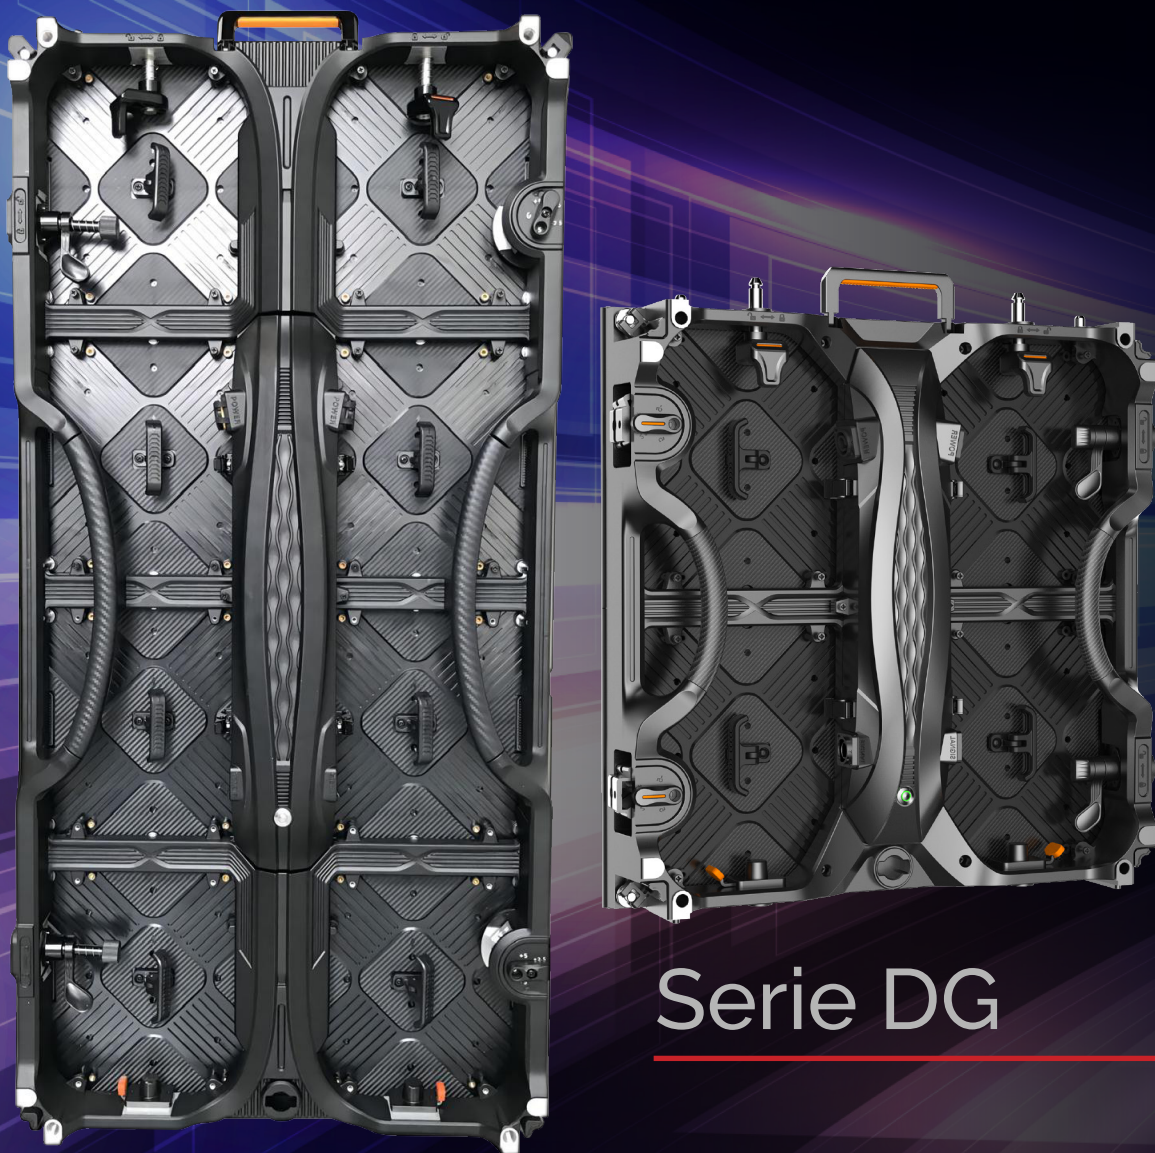

Serie DG

WWW.LEDMEDIAGROUP.COM



Stack assembly with
ground support system.



Automatic lock for single
person quick operation.



4 locks per cabinet.
2pcs at top and 2pcs at
side.





Universal module, no
need to distinguish
left/right or up/down
modules.



Upgraded curved lock
for more convenient
installation.



Easy rear and front
access.

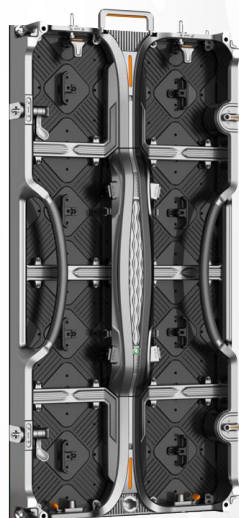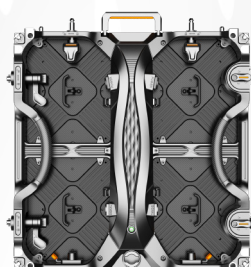

SPECIFICATION CAN BE CUSTOMIZED (INDOOR)

Part Number	DG2.6/3.9	DG-L2.6/3.9
Pixel Pitch	2.6/3.9 mm	2.6/3.9 mm
Size Module	250mm x 250mm	250mm x 250mm
Resolution of Module	96x96 / 64x64	96x96 / 64x64
Density (dots/m²)	147456/65536	147456/65536
Size of Cabinet (mm)	500x500x83	500x1000x83
Cabinet Material	Die-Casting	Die-Casting
Weight of Cabinet	8.0Kg	14Kg
Support Hanging or Not	Yes	Yes
Support Front removeable or Not	Yes	Yes
MAx Power Consumption	450W/m	450W/m²
Driving Method	1/32 1/16	1/32 1/16
Refresh Frequency	≥3840hz	≥3840hz
Brightness	800cd/m²	800cd/m²
IP Grade	IP30	IP30

SPECIFICATION CAN BE CUSTOMIZED (OUTDOOR)

Part Number	DG3.9/4.8	DG-L3.9/4.8
Pixel Pitch	3.9/4.8mm	3.9/4.8mm
Size Module	500mm x 250mm	500mm x 250mm
Resolution of Module	128x64 / 104x52	128x64 / 104x52
Density (dots/m²)	65536/43264	65536/43264
Size of Cabinet (mm)	500x500x83	500x1000x83
Cabinet Material	Die-Casting	Die-Casting
Weight of Cabinet	8.0Kg	14Kg
Support Hanging or Not	Yes	Yes
Support Front removeable or Not	Yes	Yes
MAx Power Consumption	600W/m²	600W/m²
Driving Method	1/16 1/13	1/16 1/13
Refresh Frequency	≥3840hz	≥3840hz
Brightness	4500cd/m²	4500cd/m²
IP Grade	IP65	IP65

+1 800 548 4907 / +1 305 974 5875

+ 1 305 340 1396

20815 NE 16 Ave. B6, Miami, Florida. 33179

info@ledmediagroup.com

www.ledmediagroup.com

