


OUTDOOR DOOH



LED MEDIA GROUP

Display Technology

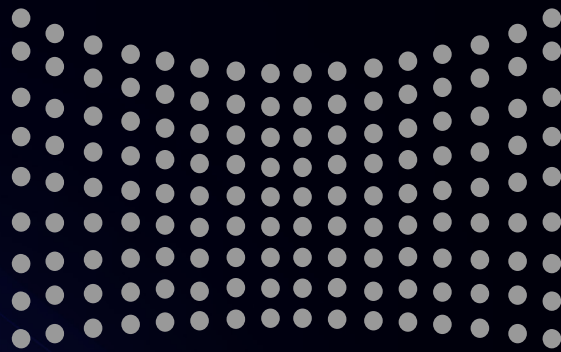


Serie MTA

Outdoor Fixed Installation

WWW.LEDMEDIAGROUP.COM

OUTDOOR DOOH




Panel frame accelerates heat dissipation.



Aluminium module chassis.



Module and back PSU can be moved out from the front totally.



Front Access Services



Easy to Install.




IP 66 Front & Rear.






SPECIFICATION CAN BE CUSTOMIZED

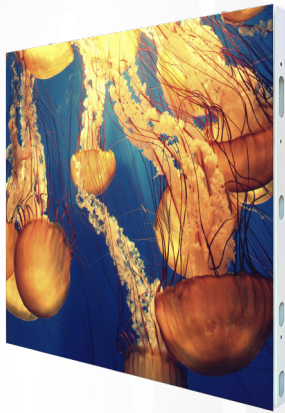

Model Number	MTA6.67	MTA8	MTA10
Pixel Pitch	6.67mm	8	10
Pixel Density	22500	15625	10000
LED Arrangement	SMD2727	SMD3535	SMD3535
Module Resolution	72*48	60*40	48*32
Module Dimension	480*320	480*320	480*320
Module Weight	1.98KG	1.98KG	1.98KG
Module Thickness	20mm	20mm	20mm
Grey Scale (bit)	14-16bit	14-16bit	14-16bit
Brightness Level	5500-6500 nits	5500-6500 nits	5500-6500 nits
Cabinet Size	960*1280 / 960*960 / 1440*960 / 960*640 / 1440*640		
Cabinet Weight (Kg)	33KG/m ²	33KG/m ²	33KG/m ²
Cabinet Thickness (mm)	74mm	74mm	74mm
Max. Cabinet Power Consumption (W)	580W±3%/m ²	550W±3%/m ²	550W±3%/m ²
Average Cabinet Power Consumption (W)	174W/m ²	165W/m ²	165W/m ²
Visual View Angle	160°/U20°, D60°	160°/U30°, D60°	160°/U30°, D60°
Input Voltage (V)	AC100-240V	AC100-240V	AC100-240V
Working Temperature (°C)	-40°-55°C	-40°-55°C	-40°-55°C
Refresh Rate	3840hz	3840hz	3840HZ
Ingress Protection	IP66	IP66	IP66



+1 800 548 4907 / +1 305 974 5875 

+ 1 305 340 1396 

20815 NE 16 Ave. B6, Miami, Florida. 33179 

info@ledmediagroup.com 

www.ledmediagroup.com 